


CKDC – CARTUCHO DUPLO ESTACIONÁRIO



- * Selo Mecânico Duplo Estacionário com duplo balanceamento
- * Robustez o que permite menor deformação em altas temperaturas e pressões elevadas
- * Projeto de Bombeamento Bidirecional através da luva
- * Limites de pressão até 25 bar
- * Adequado para Planos API 52/53/54

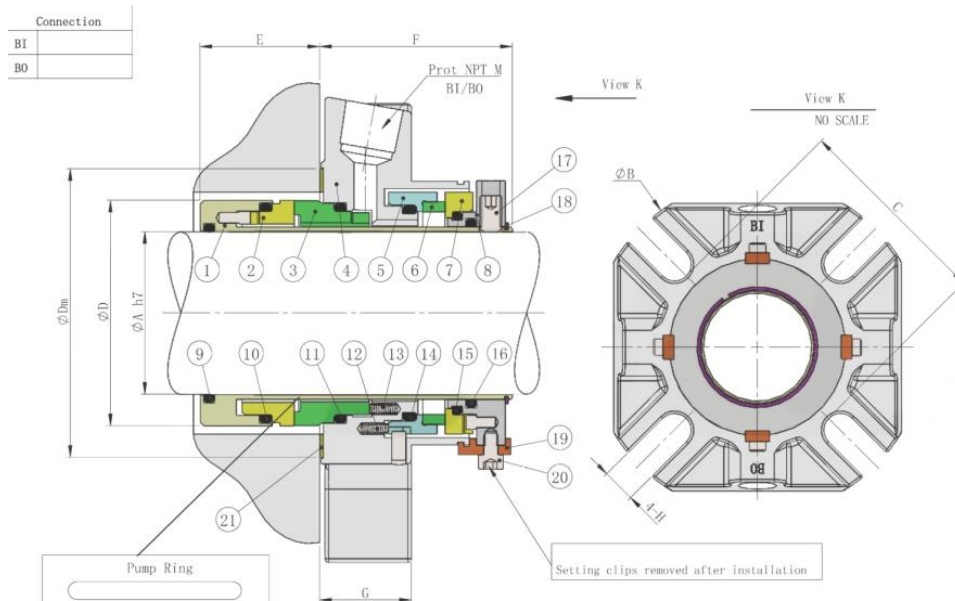



No	Description	Material
1	Shaft Sleeve	Stainless Steel
2	Internal Rotary Face	SSIC/TC
3	Internal Stationary Face	Carbon/SSIC/TC
4	Gland	Stainless Steel
5	External Stationary Seat	Stainless Steel
6	External Stationary Face	Carbon
7	External Rotary Face	TC
8	Clamp Ring	Stainless Steel
9	O-Ring	EPR/Viton/Aflas/Kalrez
10	O-Ring	EPR/Viton/Aflas/Kalrez
11	O-Ring	EPR/Viton/Aflas/Kalrez
12	Spring	Alloy 276
13	Spring	Alloy 276
14	O-Ring	EPR/Viton/Aflas/Kalrez
15	O-Ring	EPR/Viton/Aflas/Kalrez
16	O-Ring	EPR/Viton/Aflas/Kalrez
17	Drive Screw	Stainless Steel
18	Circlip	Stainless Steel
19	Setting Clip	Brass
20	Clip Screw	Stainless Steel
21	Gasket	AFI

MM

A	B	C	D	Dm	E	F	G	H	M
25	105.0	62.0	43.0	60.0	33.1	53.4	25.5	13.2	1/4"
28	105.0	62.0	46.0	60.0	33.1	53.4	25.5	13.2	1/4"
30	105.0	67.0	48.0	63.0	33.1	53.4	25.5	13.2	1/4"
32	110.0	70.0	50.0	65.0	33.1	53.4	25.5	13.2	1/4"
33	110.0	70.0	50.0	65.0	33.1	53.4	25.5	13.2	1/4"
35	113.0	72.0	53.0	68.0	33.1	53.4	25.5	13.2	1/4"
38	135.0	80.0	56.0	73.0	53.4	53.4	25.5	13.2	3/8"
40	135.0	80.0	58.0	73.0	33.1	53.4	25.5	14.2	3/8"
43	135.0	80.0	61.0	75.5	33.1	53.4	25.5	14.2	3/8"
45	138.0	82.5	62.5	80.0	33.1	53.4	25.5	14.2	3/8"
48	138.0	82.5	65.5	82.0	33.1	53.4	25.5	14.2	3/8"
50	150.0	87.0	68.0	85.0	33.1	53.4	25.5	14.2	3/8"
53	150.0	97.0	72.0	93.0	33.1	53.4	25.5	18.0	3/8"
55	150.0	97.0	73.0	88.0	33.1	53.4	25.5	18.0	3/8"
60	157.0	102.0	78.0	98.5	33.1	53.4	25.5	18.0	3/8"
65	165.0	109.0	84.8	107.0	33.1	53.4	25.5	18.0	3/8"
70	178.0	118.5	93.0	116.0	33.1	53.4	25.5	18.0	3/8"
75	190.0	129.0	100.0	125.0	44.1	63.9	28.0	18.0	3/8"
80	195.0	135.0	106.4	131.0	44.1	63.9	28.0	18.0	3/8"
85	198.0	139.0	109.5	135.0	44.1	63.9	28.0	22.0	3/8"
90	205.0	145.0	115.9	142.0	44.1	63.9	28.0	22.0	3/8"
95	208.0	148.0	119.1	147.0	44.1	63.9	28.0	22.0	3/8"
100	218.0	154.0	125.4	151.0	44.1	63.9	28.0	22.0	3/8"

POLEGADAS

A	B	C	D	Dm	E	F	G	H	M
1.000	4.134	2.441	1.693	2.362	1.303	2.102	1.004	0.520	1/4"
1.125	4.134	2.441	1.811	2.362	1.303	2.102	1.004	0.520	1/4"
1.250	4.331	2.756	1.969	2.559	1.303	2.102	1.004	0.520	1/4"
1.375	4.449	2.835	2.087	2.677	1.303	2.102	1.004	0.520	1/4"
1.500	5.315	3.150	2.205	2.874	1.303	2.102	1.004	0.520	3/8"
1.625	5.315	3.150	2.402	2.972	1.303	2.102	1.004	0.559	3/8"
1.750	5.433	3.248	2.461	3.150	1.303	2.102	1.004	0.559	3/8"
1.875	5.433	3.248	2.579	3.228	1.303	2.102	1.004	0.559	3/8"
2.000	5.906	3.818	2.677	3.780	1.303	2.102	1.004	0.559	3/8"
2.125	5.906	3.819	2.874	3.465	1.303	2.102	1.004	0.709	3/8"
2.375	6.181	4.016	3.071	3.878	1.303	2.102	1.004	0.709	3/8"
2.500	6.496	4.291	3.339	4.213	1.303	2.102	1.004	0.709	3/8"
2.625	6.496	4.291	3.339	4.213	1.303	2.102	1.004	0.709	3/8"
2.750	7.008	4.665	3.661	4.567	1.303	2.102	1.004	0.709	3/8"
2.875	7.283	4.960	3.858	4.921	1.736	2.516	1.102	0.709	3/8"
3.000	7.480	5.079	3.937	4.921	1.736	2.516	1.102	0.709	3/8"
3.125	7.677	5.315	4.189	5.157	1.736	2.516	1.102	0.709	3/8"
3.250	7.677	5.315	4.189	5.157	1.736	2.516	1.102	0.709	3/8"
3.375	7.795	5.472	4.311	5.315	1.736	2.516	1.102	0.866	3/8"
3.500	7.795	5.591	4.500	5.315	1.736	2.516	1.102	0.866	3/8"
3.625	8.071	5.709	4.563	5.591	1.736	2.516	1.102	0.866	3/8"
3.750	8.189	5.827	4.689	5.787	1.736	2.516	1.102	0.866	3/8"
4.000	8.583	6.063	4.937	5.945	1.736	2.516	1.102	0.866	3/8"

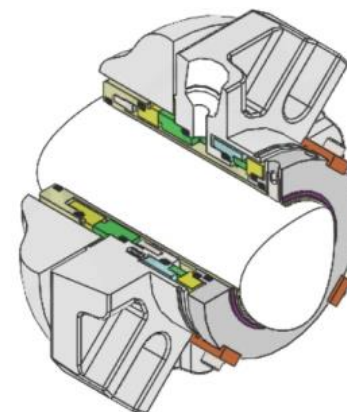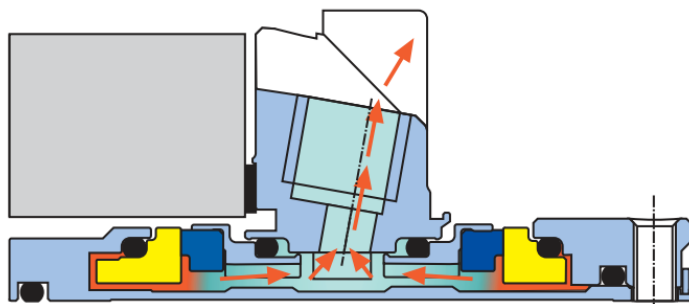

CODIÇÕES OPERACIONAIS

- **Temperatura:** - 40°C ~ +180°C
- **Pressão:** Vácuo (-28" Hg) a 20 BAR g
- **Velocidade:** 20m/s